


# HK REM 24

Pressure relief valve with SAE connection and relief valve

**HANSA FLEX**

## Properties

<b>Design</b>	SAE flange connector (e.g. for direct fitting to pumps) with magnetic relief valve 24 V; relief with magnet at zero current
<b>Scope of supply</b>	incl. SAE flanges and M10 screws
<b>Operating pressure</b>	max. 350 bar

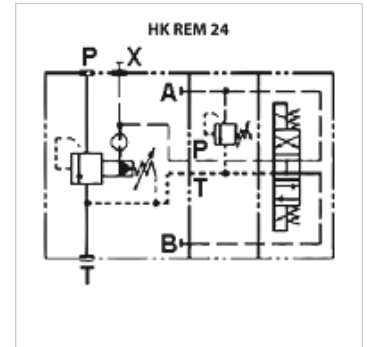

## Note

These valves must be set according to the application.

## Description

Pilot-controlled pressure relief valve with damping plunger  
2 pressure adjustment ranges (same min / max values)  
Max. volumetric flow 600 l/min  
For mineral- based hydraulic oil or synthetic fluids with comparable properties

Item					
Identification	Connection	Pressure setting range min. (bar)	Pressure setting range max. (bar)	Volumetric flow max. (L/min)	Weight (kg)
HK REM 3 20 350 350 24	SAE flange 3/4"	8	350	200,0	9,2
HK REM 4 20 210 210 24	SAE flange 1"	7	210	400,0	9,2
HK REM 5 20 210 210 24	SAE flange 1.1/4"	7	210	600,0	9,2

## Accessories

HK SP DIN 43650	Electrical plug for solenoid coil DIN 43650 / ISO 4400
-----------------	--