


HK RZMO A 030

Proportional pressure relief valve size 6

HANSA FLEX

Properties

Design	Proportional plate mounting valve pilot-controlled
Scope of supply	with coil, without plug
Operating pressure	max. 315 bar
Volumetric flow	max. 40 l/min
Connection	ISO/Cetop 03 size 6

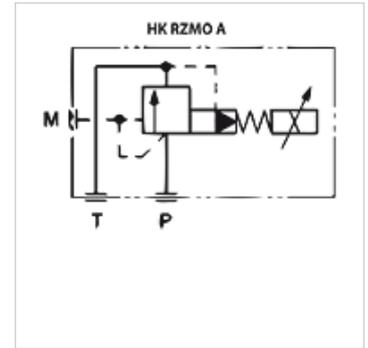

Description

Without integrated pressure transducer (a pcb Type HK EBM AS is required for control)

Completely encapsulated solenoid coils

Response time < 60 ms

Hysteresis < 1,5%

Item

Identification	acts in channel	Pressure setting range min. (bar)	Pressure setting range max. (bar)	Volumetric flow min. (L/min)	Volumetric flow max. (L/min)	Weight (kg)
HK RZMO A 030 315	P	6	315	2,5	40,0	2,8

Accessories

HK EBM AS	Proportional amplifier digital
HK SP DIN 43650	Electrical plug for solenoid coil DIN 43650 / ISO 4400
HK M HK DH	Screw set for NG 6 valves type HK DH / DG4V3