


HK RZMO AE 030

Proportional pressure relief valve size 6

HANSA FLEX

Properties

| | |
|---------------------------|---|
| Design | Proportional plate mounting valve pilot-controlled |
| Scope of supply | with integrated electronics without plug |
| Operating pressure | max. 315 bar |
| Volumetric flow | max. 40 l/min |
| Connection | ISO/Cetop 03 size 6 |

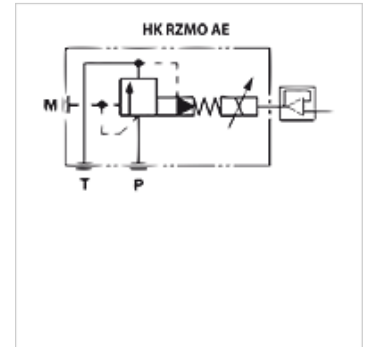

Description

with integrated electronics
Response time < 60 ms
Hysteresis < 1,5%
Pilot signal 0-10 VDC

Item

| Identification | acts in channel | Pressure setting range min. (bar) | Pressure setting range max. (bar) | Volumetric flow min. (L/min) | Volumetric flow max. (L/min) | Weight (kg) |
|--------------------|-----------------|---|---|------------------------------------|------------------------------------|----------------|
| HK RZMO AE 030 210 | P | 6 | 210 | 2,5 | 40,0 | 2,8 |
| HK RZMO AE 030 315 | P | 6 | 315 | 2,5 | 40,0 | 2,8 |

Accessories

| | |
|------------|--|
| HK SPZ | Electrical connector for proportional valves |
| HK M HK DH | Screw set for NG 6 valves type HK DH / DG4V3 |