


HK RZMO AE 030

Proportional pressure relief valve size 6

HANSA FLEX

Properties

Design	Proportional plate mounting valve pilot-controlled
Scope of supply	with integrated electronics without plug
Operating pressure	max. 315 bar
Volumetric flow	max. 40 l/min
Connection	ISO/Cetop 03 size 6

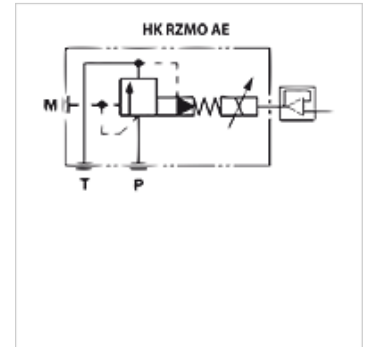

Description

with integrated electronics
Response time < 60 ms
Hysteresis < 1,5%
Pilot signal 0-10 VDC

Item

Identification	acts in channel	Pressure setting range min. (bar)	Pressure setting range max. (bar)	Volumetric flow min. (L/min)	Volumetric flow max. (L/min)	Weight (kg)
HK RZMO AE 030 210	P	6	210	2,5	40,0	2,8
HK RZMO AE 030 315	P	6	315	2,5	40,0	2,8

Accessories

HK SPZ	Electrical connector for proportional valves
HK M HK DH	Screw set for NG 6 valves type HK DH / DG4V3