


# HK RZGO AE 033

Proportional pressure reducing valve size 6

**HANSA FLEX**

## Properties

|                           |  |
|---------------------------|--|
| <b>Design</b>             | Proportional plate mounting valve pilot-controlled |
| <b>Scope of supply</b>    | with integrated electronics without plug           |
| <b>Operating pressure</b> | max. 315 bar                                       |
| <b>Volumetric flow</b>    | max. 40 l/min                                      |
| <b>Connection</b>         | ISO/Cetop 03 size 6                                |

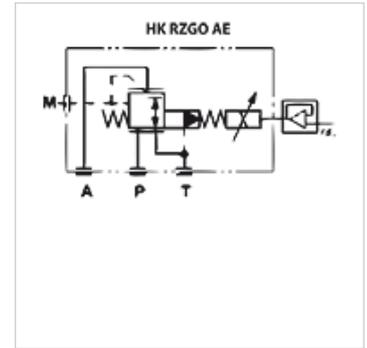

## Description

with integrated electronics  
Response time < 50 ms  
Hysteresis < 2%  
Pilot signal 0-10 VDC

## Item

| Identification     | acts in channel | Pressure setting range min. (bar) | Pressure setting range max. (bar) | Volumetric flow min. (L/min) | Volumetric flow max. (L/min) | Weight (kg) |
|--------------------|-----------------|-----------------------------------|-----------------------------------|------------------------------|------------------------------|-------------|
| HK RZGO AE 033 210 | A               | 6                                 | 210                               | 2,5                          | 40,0                         | 2,7         |

## Accessories

|            |  |
|------------|--|
| HK SPZ     | Electrical connector for proportional valves |
| HK M HK DH | Screw set for NG 6 valves type HK DH / DG4V3 |