


# HK 41 C1

Hand-operated directional control valve NG6

**HANSA FLEX**

## Properties

<b>Design</b>	4/2-way valve or 4/3-way valve
<b>Operating pressure</b>	P, A, B: max. 350bar / T: max. 210bar
<b>Volumetric flow</b>	max. 80 l/min (note characteristic curves)
<b>Connection</b>	ISO/Cetop 03 size 6
<b>Mounting</b>	4 pcs. socket head screw M5x30 12.9

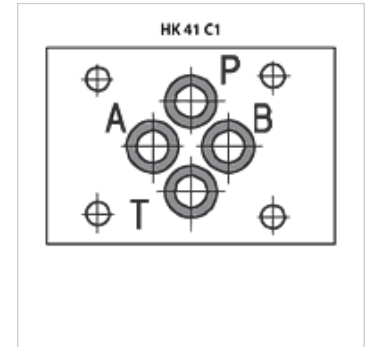

## Description

Mechanical operation with hand lever  
Hand lever mounted on side "B"

## Ordering information

Further circuits and versions available on request

## Item

Identification	Type	Overlap	Piston type	Design	Weight (kg)
HK 41 3451 0204 C1	4/2	positive (closed)	51 [PB/AT]-[PA/BT]	Spring return	1,6
HK 41 3451 0905 C1	4/2	positive (closed)	51 [PB/AT]-[PA/BT]	2 latching positions	1,6
HK 41 3403 0304 C1	4/3	positive (closed)	03 [PB/AT]-[A/B/P/T]-[PA/BT]	spring return to 0	1,6
HK 41 3408 0304 C1	4/3	positive (closed)	08 [PB/AT]-[ABT/P]-[PA/BT]	spring return to 0	1,6
HK 41 3407 0304 C1	4/3	negative (open)	07 [PA/BT]-[A/B/PT]-[PB/AT]	spring return to 0	1,6
HK 41 3401 0705 C1	4/3	negative (open)	01 [PB/AT]-[ABPT]-[PA/BT]	3 latching positions	1,6
HK 41 3403 0705 C1	4/3	positive (closed)	03 [PB/AT]-[A/B/P/T]-[PA/BT]	3 latching positions	1,6
HK 41 3408 0705 C1	4/3	positive (closed)	08 [PB/AT]-[ABT/P]-[PA/BT]	3 latching positions	1,6
HK 41 3407 0705 C1	4/3	negative (open)	07 [PA/BT]-[A/B/PT]-[PB/AT]	3 latching positions	1,6

Piston type example: [A/B/PT] = [A blocked / B blocked / P+T connected]

## Accessories

HK M HK 41 C Set of bolts for NG6 valves type HK 41 C