

# SM M


## Rod seal SM M

### Properties

<b>Design</b>	Rod packing set
<b>Operating pressure</b>	up to 250 bar
<b>Sliding speed max.</b>	0,5 m/s
<b>Temp. min.</b>	-30 °C
<b>Temp. max.</b>	110 °C
<b>Media</b>	Mineral oils Water emulsions
<b>Installation</b>	in open installation spaces
<b>Material</b>	(3) Support ring: acetal resin / PTBR (4) Seal: fabric-reinforced NBR
<b>Application</b>	Hydraulics



Spaltmaß / Clearance	
d (mm)	e (mm)
d < 110	< 0,4
d > 110	< 0,7

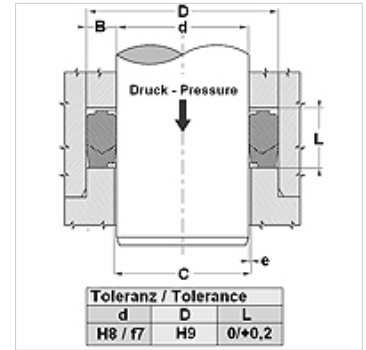

### Description

High resistance to extrusion.  
Adjustable groove height not necessary.  
Simple solution.

### Ordering information

For special operating conditions (fluid, temperature, pressure ...) please contact us.  
Alternative material possible: FPM, EPDM.

### Item

Identification	D (mm)	d (mm)	L (mm)
SM 255 196-M	65,00	50,00	22,50
SM 295 236-M	75,00	60,00	22,50
SM 334 275-M	85,00	70,00	22,50
SM 374 314-M	95,00	80,00	22,50
SM 413 354-M	105,00	90,00	22,50
SM 452 393-M	115,00	100,00	30,00