



## Properties

|                    |  |
|--------------------|--|
| Operating pressure | up to 250 bar  |
| Sliding speed max. | 0,5 m/s  |
| Temp. min.         | -30 °C   |
| Temp. max.         | 110 °C   |
| Media              | Mineral oils<br>Water emulsions  |
| Installation       | in closed or open grooves  |
| Material           | (1) Seal: fabric-reinforced NBR<br>(2) Support ring: acetal resin / PTBR |



| Spaltmaß / Clearance   |        |
|------------------------|--------|
| Druck / Pressure (bar) | e (mm) |
| 160                    | < 0,2  |
| 250                    | < 0,1  |

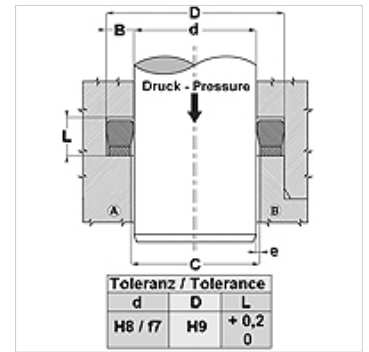

## Description

Simple solution.  
Low-friction seal.  
Extremely good sealing effect at low pressure.

## Item

| Identification      | D (mm) | d (mm) | L (mm) |
|---------------------|--------|--------|--------|
| <b>B 208 165-GS</b> | 53,00  | 42,00  | 10,00  |
| <b>B 267 236-P</b>  | 68,00  | 60,00  | 11,00  |
| <b>B 275 216-GS</b> | 70,00  | 55,00  | 10,50  |
| <b>B 314 255-GS</b> | 80,00  | 65,00  | 11,50  |
| <b>B 334 255-GS</b> | 85,00  | 65,00  | 14,50  |
| <b>B 334 275-GS</b> | 85,00  | 70,00  | 12,00  |
| <b>B 366 307-GS</b> | 93,00  | 78,00  | 11,50  |
| <b>B 374 314-GS</b> | 95,00  | 80,00  | 12,00  |
| <b>B 748 669-GS</b> | 190,00 | 170,00 | 14,50  |