

B GS
Rod seal B GS

Properties

Operating pressure	up to 250 bar
Sliding speed max.	0,5 m/s
Temp. min.	-30 °C
Temp. max.	110 °C
Media	Mineral oils Water emulsions
Installation	in closed or open grooves
Material	(1) Seal: fabric-reinforced NBR (2) Support ring: acetal resin / PTBR



Spaltmaß / Clearance	
Druck / Pressure (bar)	e (mm)
160	< 0,2
250	< 0,1

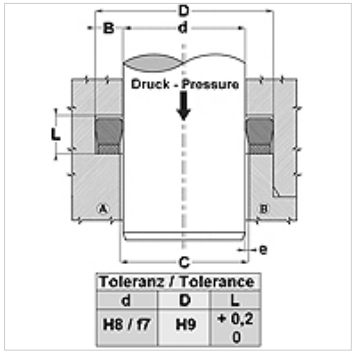

Toleranz / Tolerance		
d	D	L
H8 / f7	H9	+ 0,2 0

Description

Simple solution.
Low-friction seal.
Extremely good sealing effect at low pressure.

Item

Identification	D (mm)	d (mm)	L (mm)
B 208 165-GS	53,00	42,00	10,00
B 267 236-P	68,00	60,00	11,00
B 275 216-GS	70,00	55,00	10,50
B 314 255-GS	80,00	65,00	11,50
B 334 255-GS	85,00	65,00	14,50
B 334 275-GS	85,00	70,00	12,00
B 366 307-GS	93,00	78,00	11,50
B 374 314-GS	95,00	80,00	12,00
B 748 669-GS	190,00	170,00	14,50

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.