
FBSG

Heat protection hose, silicate, silicone

Properties

Application	Foundries, steelworks, glassworks, shipyards etc.
Application	as contact protection for hot and cold hoses
Colour	grey
Temp. max.	300 °C
Material	Silontex yarn with a silicone cover

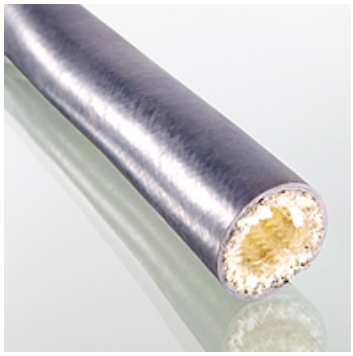

Note

Approval by Germanischer Lloyd

Description

Core is braided hose of Silontex yarn, textured and twisted, wall thickness approx. 3 mm, grey silicone cover outside, flame-resistant, self-extinguishing, approx. 50° Shore

Item

Identification	Internal Ø (mm)	Weight per m (kg)
FBSG 010	10	0,232
FBSG 015	15	0,243
FBSG 020	20	0,323
FBSG 022	22	0,335
FBSG 025	25	0,360
FBSG 030	30	0,391
FBSG 032	32	0,430
FBSG 035	35	0,471
FBSG 040	40	0,541
FBSG 050	50	0,716
FBSG 060	60	0,860

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.