


## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	conical seat
<b>Standard</b>	ISO 228-1
<b>Construction</b>	straight
<b>Design</b>	3-part threaded connection
<b>Material</b>	Stainless steel

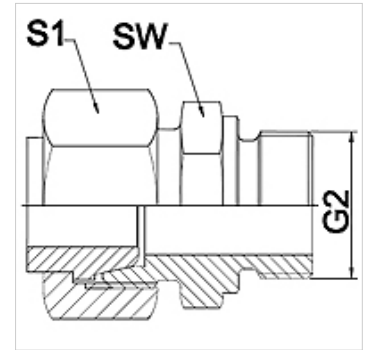

## Note

Width across flats values are listed for reference purposes!

## Ordering information

Other designs available on request

## Item

Identification	DN	PN (bar)	G2	AF (mm)	S1 (mm)
WA 006 AFL-VR VA	6	250	G 1/4" -19	19	17,0
WA 008 AFL-VR VA	8	250	G 1/4" -19	19	19,0
WA 010 AFL-VR VA	10	250	G 3/8" -19	22	22,0
WA 013 AFL-VR VA	13	250	G 1/2" -14	27	27,0
WA 016 AFL-VR VA	16	160	G 1/2" -14	27	32,0
WA 020 AFL-VR VA	20	160	G 3/4" -14	32	36,0
WA 025 AFL-VR VA	25	100	G 1" -11	41	41,0
WA 032 AFL-VR VA	32	100	G 1.1/4" -11	50	50,0
WA 040 AFL-VR VA	40	100	G 1.1/2" -11	55	60,0

## Product versions

WA AFL-VR Connector ... AFL-VR, steel, Steel