
WA LF PN6 VA

Connector ... LF, PN 6, VA

Properties

Application	Connection fitting for metal hoses
Connection 1	plain collar with loose flange at pressure rating PN6
Sealing form 1	flat sealing
Standard	DIN 2641 DIN EN 1092-1
Application	soldered variant temperature resistant up to 200 °C welded variant in stainless steel temperature resistant up to 550 °C
Construction	straight
Material	Stainless steel pipe socket Stainless steel collar Stainless steel loose flange



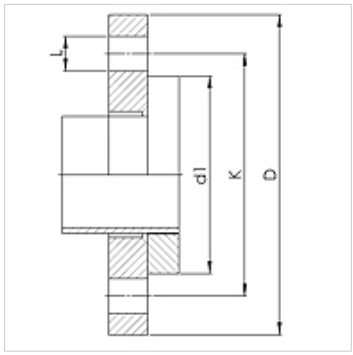

Ordering information

Other designs available on request

Item

Identification	DN	PN (bar)	D (mm)	d1 (mm)	K (mm)	L (mm)
WA 010 LF PN6 VA	10	6	75	35	50	11
WA 013 LF PN6 VA	13	6	80	40	55	11
WA 020 LF PN6 VA	20	6	90	50	65	11
WA 025 LF PN6 VA	25	6	100	60	75	11
WA 032 LF PN6 VA	32	6	120	70	90	14
WA 040 LF PN6 VA	40	6	130	80	100	14
WA 050 LF PN6 VA	50	6	140	90	110	14
WA 065 LF PN6 VA	65	6	160	110	130	14
WA 080 LF PN6 VA	80	6	190	128	150	18
WA 100 LF PN6 VA	100	6	210	148	170	18
WA 125 LF PN6 VA	125	6	240	178	200	18
WA 150 LF PN6 VA	150	6	265	202	225	18

Product versions

WA LF PN6	Connector ... LF, PN 6, steel, Stainless steel pipe socket

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.