


# WA LF PN10 VA

Connector ... LF, PN 10, VA

## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	Short stub end with loose flange at pressure rating PN10
<b>Sealing form 1</b>	flat sealing
<b>Standard</b>	DIN 2673 DIN EN 1092-1
<b>Application</b>	soldered variant temperature resistant up to 200 °C welded variant in stainless steel temperature resistant up to 550 °C
<b>Construction</b>	straight
<b>Material</b>	Stainless steel collar Stainless steel loose flange

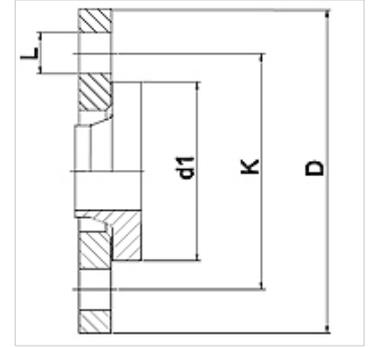

## Ordering information

Other designs available on request

Item	DN	PN (bar)	D (mm)	d1 (mm)	K (mm)	L (mm)
WA 010 LF PN10 VA	10	10	90	40	60	14
WA 013 LF PN10 VA	13	10	95	45	65	14
WA 020 LF PN10 VA	20	10	105	58	75	14
WA 025 LF PN10 VA	25	10	115	68	85	14
WA 032 LF PN10 VA	32	10	140	78	100	18
WA 040 LF PN10 VA	40	10	150	88	110	18
WA 050 LF PN10 VA	50	10	165	102	125	18
WA 065 LF PN10 VA	65	10	185	122	145	18
WA 080 LF PN10 VA	80	10	200	138	160	18
WA 100 LF PN10 VA	100	10	220	158	180	18
WA 125 LF PN10 VA	125	10	250	188	210	18
WA 150 LF PN10 VA	150	10	285	212	240	22

## Product versions

WA LF PN10 Connector ... LF, PN 10, steel, Steel collar