


WA LF PN40

Connector ... LF, PN 40, steel

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Application | Connection fitting for metal hoses |
| Connection 1 | plain collar with loose flange at pressure rating PN40 |
| Sealing form 1 | flat sealing |
| Standard | DIN 2656 DIN EN 1092-1 |
| Application | soldered variant temperature resistant up to 200 °C welded variant in stainless steel temperature resistant up to 550 °C |
| Construction | straight |
| Material | Stainless steel pipe socket Steel collar Steel loose flange |

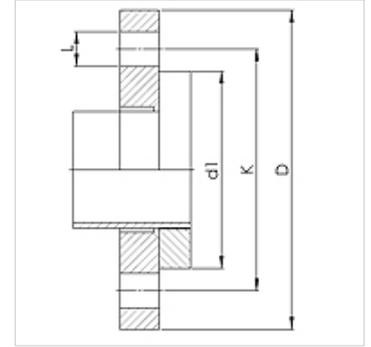

Ordering information

Other designs available on request

| Item | | | | | | |
|----------------|-----|----------|--------|---------|--------|--------|
| Identification | DN | PN (bar) | D (mm) | d1 (mm) | K (mm) | L (mm) |
| WA 010 LF PN40 | 10 | 40 | 90 | 40 | 60 | 14 |
| WA 013 LF PN40 | 13 | 40 | 95 | 45 | 65 | 14 |
| WA 020 LF PN40 | 20 | 40 | 105 | 58 | 75 | 14 |
| WA 025 LF PN40 | 25 | 40 | 115 | 68 | 85 | 14 |
| WA 032 LF PN40 | 32 | 40 | 140 | 78 | 100 | 18 |
| WA 040 LF PN40 | 40 | 40 | 150 | 88 | 110 | 18 |
| WA 050 LF PN40 | 50 | 40 | 165 | 102 | 125 | 18 |
| WA 065 LF PN40 | 65 | 40 | 185 | 122 | 145 | 18 |
| WA 080 LF PN40 | 80 | 40 | 200 | 138 | 160 | 18 |
| WA 100 LF PN40 | 100 | 40 | 235 | 162 | 190 | 22 |
| WA 125 LF PN40 | 125 | 40 | 270 | 188 | 220 | 26 |
| WA 150 LF PN40 | 150 | 40 | 300 | 218 | 250 | 26 |

Product versions

WA LF PN40 VA Connector ... LF, PN 40, VA, Stainless steel pipe socket