


# WA LF PN40 VA

Connector ... LF, PN 40, VA

## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	plain collar with loose flange at pressure rating PN40
<b>Sealing form 1</b>	flat sealing
<b>Standard</b>	DIN 2656 DIN EN 1092-1
<b>Application</b>	soldered variant temperature resistant up to 200 °C welded variant in stainless steel temperature resistant up to 550 °C
<b>Construction</b>	straight
<b>Material</b>	Stainless steel pipe socket Stainless steel collar Stainless steel loose flange

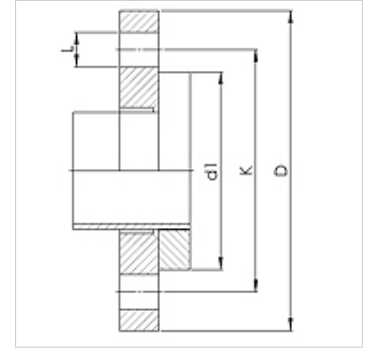

## Ordering information

Other designs available on request

Item						
Identification	DN	PN (bar)	D (mm)	d1 (mm)	K (mm)	L (mm)
WA 010 LF PN40 VA	10	40	90	40	60	14
WA 013 LF PN40 VA	13	40	95	45	65	14
WA 020 LF PN40 VA	20	40	105	58	75	14
WA 025 LF PN40 VA	25	40	115	68	85	14
WA 032 LF PN40 VA	32	40	140	78	100	18
WA 040 LF PN40 VA	40	40	150	88	110	18
WA 050 LF PN40 VA	50	40	165	102	125	18
WA 065 LF PN40 VA	65	40	185	122	145	18
WA 080 LF PN40 VA	80	40	200	138	160	18
WA 100 LF PN40 VA	100	40	235	162	190	22
WA 125 LF PN40 VA	125	40	270	188	220	26
WA 150 LF PN40 VA	150	40	300	218	250	26

## Product versions

WA LF PN40 Connector ... LF, PN 40, steel, Stainless steel pipe socket