
WA LB PN6 VA

Connector ... LB, PN 6, VA

Properties

Application	Connection fitting for metal hoses
Connection 1	Welding neck flange with loose flange at pressure rating PN6
Sealing form 1	flat sealing
Standard	DIN 2641 DIN EN 1092-1
Application	soldered variant temperature resistant up to 200 °C welded variant in stainless steel temperature resistant up to 550 °C
Construction	straight
Material	Stainless steel formed flange Stainless steel loose flange



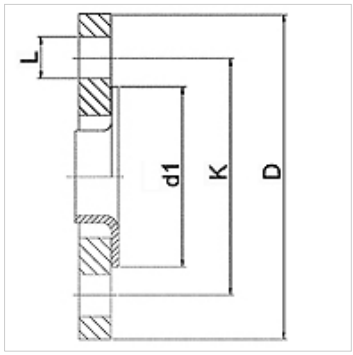

Ordering information

Other designs available on request

Item

Identification	DN	PN (bar)	D (mm)	d1 (mm)	K (mm)	L (mm)
WA 010 LB PN6 VA	10	6	75	35	50	11
WA 013 LB PN6 VA	13	6	80	40	55	11
WA 020 LB PN6 VA	20	6	90	50	65	11
WA 025 LB PN6 VA	25	6	100	60	75	11
WA 032 LB PN6 VA	32	6	120	70	90	14
WA 040 LB PN6 VA	40	6	130	80	100	14
WA 050 LB PN6 VA	50	6	140	90	110	14
WA 065 LB PN6 VA	65	6	160	110	130	14
WA 080 LB PN6 VA	80	6	190	128	150	18
WA 100 LB PN6 VA	100	6	210	148	170	18
WA 125 LB PN6 VA	125	6	240	178	200	18
WA 150 LB PN6 VA	150	6	265	202	225	18

Product versions

WA LB PN6	Connector ... LB, PN 6, steel, Stainless steel formed flange

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.