

# CH3 FPM-C


## Chevron piston ring CH3

### Properties

<b>Design</b>	Chevron piston ring
<b>Operating pressure</b>	up to 400 bar
<b>Sliding speed max.</b>	0,5 m/s
<b>Temp. min.</b>	-30 °C
<b>Temp. max.</b>	150 °C
<b>Media</b>	Mineral oils Water emulsions
<b>Installation</b>	on multi-part pistons



Toleranz / Tolerance			
D	d	d1	L
H9 / e8	h11	0/-0,30	0/+0,30

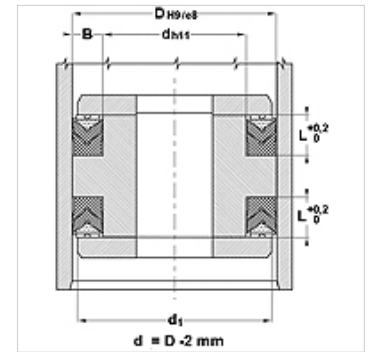

### Description

High temperature resistance.  
for difficult working conditions such as hydraulic shocks,  
Strong vibrations or poor surfaces.

### Ordering information

For special operating conditions (fluid, temperature, pressure ...) please contact us.

### Item

Identification	D (mm)	d (mm)	L (mm)
CH3-100 FPM-C	100	80	21,2
CH3-140 FPM-C	140	115	25,8