


# HK PT77

## Pressure sensor regulator PT77

### Properties

<b>Design</b>	suitable for DIN rail mounting 35x7.5
<b>Operating temperature max.</b>	70 °C
<b>Connection</b>	G 1/4" male, rotatable
<b>Operating voltage</b>	24 V DC
<b>Electrical connection</b>	Round plug connector M 12 x 1, 4-pol.
<b>Material</b>	Housing: Plastic Parts in contact with media: Stainless steel V2A Gasket: NBR
<b>Scope of supply</b>	without plug
<b>protection class</b>	IP 65

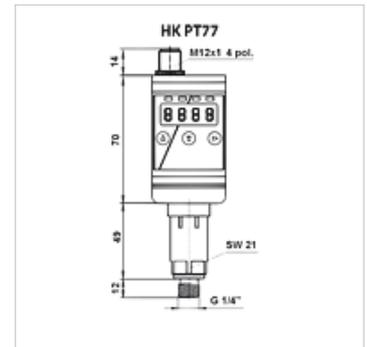

### Description

Compact unit comprising pressure switch, pressure sensor and LED indicator

Housing can be rotated to 270°

Output: 2x PNP (freely programmable, NC/NO, window/hysteresis)

Without analog output

Accuracy  $\pm 0.5$  % of range limit value

Min./max. value memory

### Ordering information

Order M12 plug with cable separately

### Item

Identification	Measuring range	Weight (kg)
HK PT77 1 250 2S	0 to 250 bar	0,5
HK PT77 1 600 2S	0 to 600 bar	0,5

### Accessories

HK DSR 4POL M12 4-pin angle plug with cable