
HK PT77

Pressure sensor regulator PT77

Properties

Design	suitable for DIN rail mounting 35x7.5
Operating temperature max.	70 °C
Connection	G 1/4" male, rotatable
Operating voltage	24 V DC
Electrical connection	Round plug connector M 12 x 1, 4-pol.
Material	Housing: Plastic Parts in contact with media: Stainless steel V2A Gasket: NBR
Scope of supply	without plug
protection class	IP 65



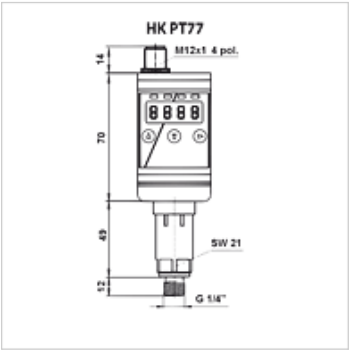

Description

Compact unit comprising pressure switch, pressure sensor and LED indicator
Housing can be rotated to 270°
Output: 2x PNP (freely programmable, NC/NO, window/hysteresis)
Without analog output
Accuracy ±0.5 % of range limit value
Min./max. value memory

Ordering information

Order M12 plug with cable separately

Item

Identification	Measuring range	Weight (kg)
HK PT77 1 250 2S	0 to 250 bar	0,5
HK PT77 1 600 2S	0 to 600 bar	0,5

Accessories

HK DSR 4POL	M12 4-pin angle plug with cable

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.