


HK PT77

Pressure sensor regulator PT77

Properties

| | |
|-----------------------------------|-------------------------------------------------------------------------------------|
| Design | suitable for DIN rail mounting 35x7.5 |
| Operating temperature max. | 70 °C |
| Connection | G 1/4" male, rotatable |
| Operating voltage | 24 V DC |
| Electrical connection | Round plug connector M 12 x 1, 4-pol. |
| Material | Housing: Plastic Parts in contact with media: Stainless steel V2A Gasket: NBR |
| Scope of supply | without plug |
| protection class | IP 65 |

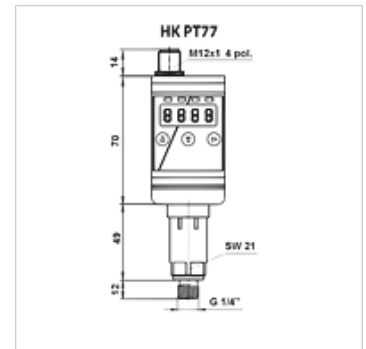

Description

Compact unit comprising pressure switch, pressure sensor and LED indicator

Housing can be rotated to 270°

Output: 2x PNP (freely programmable, NC/NO, window/hysteresis)

Without analog output

Accuracy ± 0.5 % of range limit value

Min./max. value memory

Ordering information

Order M12 plug with cable separately

Item

| Identification | Measuring range | Weight (kg) |
|------------------|-----------------|-------------|
| HK PT77 1 250 2S | 0 to 250 bar | 0,5 |
| HK PT77 1 600 2S | 0 to 600 bar | 0,5 |

Accessories

HK DSR 4POL M12 4-pin angle plug with cable