

PA 500 HL A

Swage fitting CEL

HANSA FLEX

Properties

Application Swage fitting for HD 500 hoses

Connection 1 metric cylindrical outer thread

Sealing form 1 24° inner cone

Short code CEL


Standard ISO 8434-1

Integration without pull-out protection

Scope of supply Swage nipple + swage ferrule

Material Steel

Surface electro galvanised

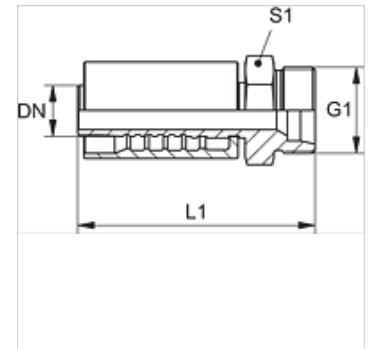

Item

Identification	DN	Size	Inches	G1	for external pipe Ø (mm)	L1 (mm)
PA 532 HL A	31	20	1.1/4"	M 45 x 2	35	115,0