
SSR
Abrasion protection, round

Properties

Application	Hose lines that are subjected to a shearing load during movement.
Application	as external protection for hose lines and / or for reinforcing the bending radius.
Material	Steel
Surface	electro galvanised



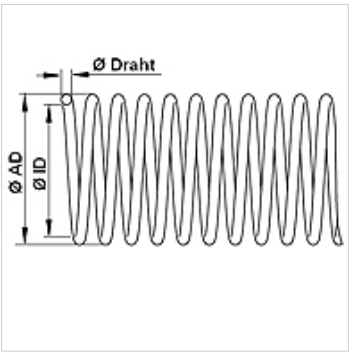

Description

Round spring steel wire protective helix protects the hose against extreme external abrasion.

Item

Identification	Ø ID (mm)	Ø AD (mm)	Wire Ø (mm)
SSR 14-2	14,00	18,00	2,0
SSR 18-2	18,00	22,00	2,0
SSR 20-2	20,00	24,00	2,0
SSR 23-2	23,00	27,00	2,0
SSR 25-2	25,00	29,00	2,0
SSR 27-2	27,00	31,00	2,0
SSR 27-2.5	27,00	32,00	2,5
SSR 30-2	30,00	34,00	2,0
SSR 34-3	34,00	40,00	3,0
SSR 41-3	41,00	47,00	3,0
SSR 48-3	48,00	54,00	3,0
SSR 51-3	51,00	57,00	3,0
SSR 52-3	52,00	58,00	3,0
SSR 54-3	54,00	60,00	3,0
SSR 56-3	56,00	62,00	3,0
SSR 68-3	68,00	74,00	3,0
SSR 73-3	73,00	79,00	3,0

Product versions

SSR VA	Abrasion protection, round, VA, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.