
DAMPF HR

Steam fittings HR, with steel clamping shell

Properties

Application	Hot water or saturated steam applications
Connection 1	BSPT conical external threads
Sealing form 1	flat sealing
Operating pressure	up to 18 bar
Short code	AGR-Flat
Standard	DIN EN 14423 thread standard ISO 228/DIN 2999
Scope of supply	with clamping shells
Temp. range	saturated steam up to +210 °C hot water up to +120 °C
Material	Steel Pressed brass clamping shells
Surface	electro galvanised



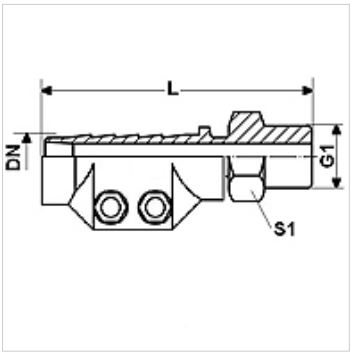

Item

Identification	DN	Size	Inches	G1	L (mm)	Clamping range (mm)	S1 (mm)
DAMPF 13 HR	12	8	1/2"	G 1/2" -14	95,0	24 - 26	22
DAMPF 19 HR	19	12	3/4"	G 3/4" -14	95,0	32 - 34	27
DAMPF 25 HR	25	16	1"	G 1" -11	100,0	39 - 41	36
DAMPF 32 HR	31	20	1.1/4"	G 1.1/4" -11	105,0	47 - 50	46
DAMPF 38 HR	38	24	1.1/2"	G 1.1/2" -11	125,0	53 - 56	50
DAMPF 50 HR	51	32	2"	G 2" -11	140,0	67 - 69	60

DN = Nominal diameter, nominal width

Product versions

DAMPF AR MG	Steam fittings AR, with clamping brass shell, Brass
DAMPF AR VA	Steam fittings AR, with stainless steel clamping shell, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.