


DAMPF HR MG

Steam fittings HR, with brass clamping shell

HANSA FLEX

Properties

| | |
|---------------------------|--|
| Application | Hot water or saturated steam applications |
| Connection 1 | BSPT conical external threads |
| Sealing form 1 | flat sealing |
| Operating pressure | up to 18 bar |
| Short code | AGR-Flat |
| Standard | DIN EN 14423 thread standard ISO 228/DIN 2999 |
| Scope of supply | with clamping shells |
| Temp. range | saturated steam up to +210 °C hot water up to +120 °C |
| Material | Brass Pressed brass clamping shells |

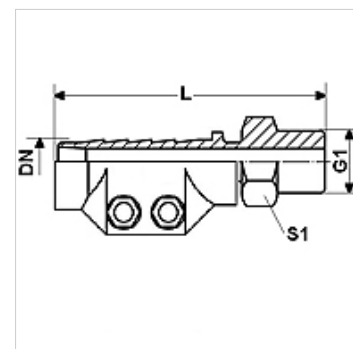

Item

| Identification | DN | Size | Inches | G1 | L (mm) | Clamping range (mm) | S1 (mm) |
|-----------------------|----|------|--------|--------------|-----------|---------------------|------------|
| DAMPF 13 HR MG | 12 | 8 | 1/2" | G 1/2" -14 | 95,0 | 24 - 26 | 22 |
| DAMPF 19 HR MG | 19 | 12 | 3/4" | G 3/4" -14 | 95,0 | 32 - 34 | 27 |
| DAMPF 25 HR MG | 25 | 16 | 1" | G 1" -11 | 100,0 | 39 - 41 | 36 |
| DAMPF 32 HR MG | 31 | 20 | 1.1/4" | G 1.1/4" -11 | 105,0 | 47 - 50 | 46 |
| DAMPF 38 HR MG | 38 | 24 | 1.1/2" | G 1.1/2" -11 | 125,0 | 53 - 56 | 50 |
| DAMPF 50 HR MG | 51 | 32 | 2" | G 2" -11 | 140,0 | 67 - 69 | 60 |

DN = Nominal diameter, nominal width

Product versions

| | |
|--------------------|---|
| DAMPF AR | Steam fittings AR, with steel clamping shell, Steel |
| DAMPF AR VA | Steam fittings AR, with stainless steel clamping shell, Stainless steel |