
DAMPF HR MG

Steam fittings HR, with brass clamping shell

Properties

Application	Hot water or saturated steam applications
Connection 1	BSPT conical external threads
Sealing form 1	flat sealing
Operating pressure	up to 18 bar
Short code	AGR-Flat
Standard	DIN EN 14423 thread standard ISO 228/DIN 2999
Scope of supply	with clamping shells
Temp. range	saturated steam up to +210 °C hot water up to +120 °C
Material	Brass Pressed brass clamping shells



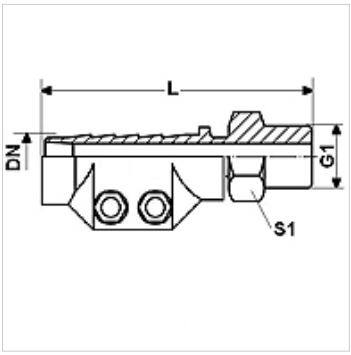

Item

Identification	DN	Size	Inches	G1	L (mm)	Clamping range (mm)	S1 (mm)
DAMPF 13 HR MG	12	8	1/2"	G 1/2" -14	95,0	24 - 26	22
DAMPF 19 HR MG	19	12	3/4"	G 3/4" -14	95,0	32 - 34	27
DAMPF 25 HR MG	25	16	1"	G 1" -11	100,0	39 - 41	36
DAMPF 32 HR MG	31	20	1.1/4"	G 1.1/4" -11	105,0	47 - 50	46
DAMPF 38 HR MG	38	24	1.1/2"	G 1.1/2" -11	125,0	53 - 56	50
DAMPF 50 HR MG	51	32	2"	G 2" -11	140,0	67 - 69	60

DN = Nominal diameter, nominal width

Product versions

DAMPF AR	Steam fittings AR, with steel clamping shell, Steel
DAMPF AR VA	Steam fittings AR, with stainless steel clamping shell, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.