


# TW-TG VA

Tank truck fitting, stainless steel

**HANSA FLEX**

## Properties

<b>Application</b>	Tankers
<b>Connection 1</b>	Hose connection
<b>Connection 2</b>	BSP cylindrical external threads
<b>Design</b>	with safety collar
<b>Standard</b>	DIN EN 14 420-5
<b>Material</b>	Stainless steel

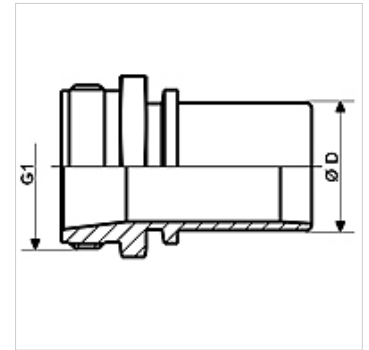

## Item

Identification	DN*	Ø D (mm)	G1	Max. working pressure (bar)
TW-TG 12 13 VA	13	13,4	G 1/2" -14	16
TW-TG 34 19 VA	19	19,4	G 3/4" -14	16
TW-TG 10 25 VA	25	25,4	G 1" -11	16
TW-TG 114 32 VA	31	32,4	G 1.1/4" -11	16
TW-TG 112 38 VA	38	38,4	G 1.1/2" -11	16
TW-TG 20 50 VA	50	50,4	G 2" -11	16
TW-TG 212 63 VA	63	63,4	G 2.1/2" -11	16
TW-TG 30 63 VA	63	63,4	G 3" -11	16
TW-TG 30 75 VA	75	75,4	G 3" -11	16
TW-TG 30 80 VA	80	80,4	G 3" -11	16
TW-TG 40 100 VA	100	100,4	G 4" -11	16

DN = Nominal diameter, nominal width

## Product versions

TW-TG MG Tanker fitting, brass, Brass

## Accessories

KS AL	Clamp ring fitting, aluminium
KS FIX AL	Clamping shell for pinning, aluminium

## Accessory for following products

TW	Tank truck hose
TW OW	Tank truck hose without helix