


TW-T MG

Tank truck fitting, brass

Properties

| | |
|---------------------|----------------------------------|
| Application | Tankers |
| Connection 1 | Hose connection |
| Connection 2 | BSP cylindrical external threads |
| Design | with safety collar |
| Standard | DIN EN 14 420-5 |
| Material | Brass |

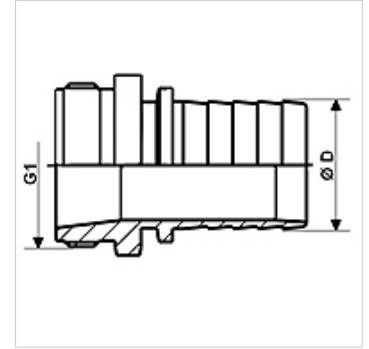

Item

| Identification | DN* | Ø D (mm) | G1 | Max. working pressure (bar) |
|-----------------------|-----|----------|--------------|-----------------------------|
| TW-T 12 13 MG | 13 | 13,4 | G 1/2" -14 | 16 |
| TW-T 34 19 MG | 19 | 19,4 | G 3/4" -14 | 16 |
| TW-T 10 25 MG | 25 | 25,4 | G 1" -11 | 16 |
| TW-T 114 32 MG | 31 | 32,4 | G 1.1/4" -11 | 16 |
| TW-T 112 38 MG | 38 | 38,4 | G 1.1/2" -11 | 16 |
| TW-T 20 50 MG | 50 | 50,4 | G 2" -11 | 16 |
| TW-T 212 63 MG | 63 | 63,4 | G 2.1/2" -11 | 16 |
| TW-T 30 75 MG | 75 | 75,4 | G 3" -11 | 16 |
| TW-T 40 100 MG | 100 | 100,4 | G 4" -11 | 16 |

DN = Nominal diameter, nominal width

Accessories

| | |
|------------------|---------------------------------------|
| KS AL | Clamp ring fitting, aluminium |
| KS FIX AL | Clamping shell for pinning, aluminium |

Accessory for following products

| | |
|--------------|-------------------------------|
| TW | Tank truck hose |
| TW OW | Tank truck hose without helix |