# TW-TUEG MG


Tanker fitting, brass

HANSA-FLEX

## Properties

| | |
|---|---|
| **Application** | Tankers |
| **Connection 1** | Hose connection |
| **Connection 2** | BSP nut thread |
| **Sealing form 2** | Flat seal |
| **Design** | with safety collar |
| **Standard** | DIN EN 14 420-5 |
| **Scope of supply** | with PUR flat seal |
| **Material** | Brass |



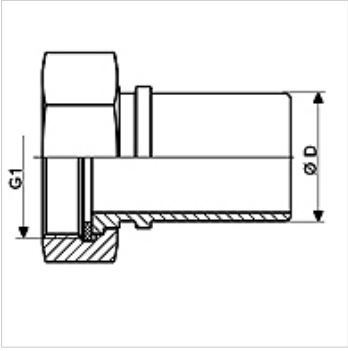


## Item

| Identification | DN* | Ø D (mm) | G1 | Max. working pressure (bar) |
|---|---|---|---|---|
| **TW-TUEG 12 13 MG** | 13 | 13,4 | G 1/2" -14 | 16 |
| **TW-TUEG 34 19 MG** | 19 | 19,4 | G 3/4" -14 | 16 |
| **TW-TUEG 10 25 MG** | 25 | 25,4 | G 1" -11 | 16 |
| **TW-TUEG 114 32 MG** | 32 | 32,4 | G 1.1/4" -11 | 16 |
| **TW-TUEG 112 35 MG** | 35 | 35,0 | G 1.1/2” | 16 |
| **TW-TUEG 112 38 MG** | 38 | 38,4 | G 1.1/2” | 16 |
| **TW-TUEG 20 38 MG** | 38 | 38,4 | G 2" -11 | 16 |
| **TW-TUEG 20 50 MG** | 50 | 50,4 | G 2" -11 | 16 |
| **TW-TUEG 212 63 MG** | 63 | 63,4 | G 2.1/2" -11 | 16 |
| **TW-TUEG 30 75 MG** | 75 | 75,4 | G 3" -11 | 16 |
| **TW-TUEG 40 100 MG** | 100 | 100,4 | G 4" -11 | 16 |

DN = Nominal diameter, nominal width

## Product versions

| | |
|---|---|
| **TW-TUEG VA** | Tank truck fitting, stainless steel, Stainless steel |

## Accessories

| | |
|---|---|
| **KS AL** | Clamp ring fitting, aluminium |
| **KS FIX AL** | Clamping shell for pinning, aluminium |

## Accessory for following products

| | |
|---|---|
| **TW** | Tank truck hose |
| **TW OW** | Tank truck hose without helix |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*