


TW-TUEG MG

Tanker fitting, brass

HANSA FLEX

Properties

| | |
|------------------------|--------------------|
| Application | Tankers |
| Connection 1 | Hose connection |
| Connection 2 | BSP nut thread |
| Sealing form 2 | Flat seal |
| Design | with safety collar |
| Standard | DIN EN 14 420-5 |
| Scope of supply | with PUR flat seal |
| Material | Brass |

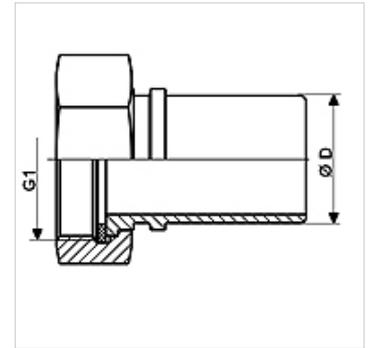

Item

| Identification | DN* | Ø D (mm) | G1 | Max. working pressure (bar) |
|--------------------------|-----|----------|--------------|-----------------------------|
| TW-TUEG 12 13 MG | 13 | 13,4 | G 1/2" -14 | 16 |
| TW-TUEG 34 19 MG | 19 | 19,4 | G 3/4" -14 | 16 |
| TW-TUEG 10 25 MG | 25 | 25,4 | G 1" -11 | 16 |
| TW-TUEG 114 32 MG | 32 | 32,4 | G 1.1/4" -11 | 16 |
| TW-TUEG 112 35 MG | 35 | 35,0 | G 1.1/2" | 16 |
| TW-TUEG 112 38 MG | 38 | 38,4 | G 1.1/2" | 16 |
| TW-TUEG 20 38 MG | 38 | 38,4 | G 2" -11 | 16 |
| TW-TUEG 20 50 MG | 50 | 50,4 | G 2" -11 | 16 |
| TW-TUEG 212 63 MG | 63 | 63,4 | G 2.1/2" -11 | 16 |
| TW-TUEG 30 75 MG | 75 | 75,4 | G 3" -11 | 16 |
| TW-TUEG 40 100 MG | 100 | 100,4 | G 4" -11 | 16 |

DN = Nominal diameter, nominal width

Product versions

TW-TUEG VA Tank truck fitting, stainless steel, Stainless steel

Accessories

| | |
|------------------|---------------------------------------|
| KS AL | Clamp ring fitting, aluminium |
| KS FIX AL | Clamping shell for pinning, aluminium |

Accessory for following products

| | |
|--------------|-------------------------------|
| TW | Tank truck hose |
| TW OW | Tank truck hose without helix |