


TW-TUEG MG

Tanker fitting, brass

HANSA FLEX

Properties

Application	Tankers
Connection 1	Hose connection
Connection 2	BSP nut thread
Sealing form 2	Flat seal
Design	with safety collar
Standard	DIN EN 14 420-5
Scope of supply	with PUR flat seal
Material	Brass

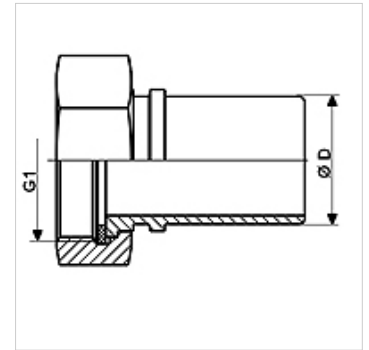

Item

Identification	DN*	Ø D (mm)	G1	Max. working pressure (bar)
TW-TUEG 12 13 MG	13	13,4	G 1/2" -14	16
TW-TUEG 34 19 MG	19	19,4	G 3/4" -14	16
TW-TUEG 10 25 MG	25	25,4	G 1" -11	16
TW-TUEG 114 32 MG	32	32,4	G 1.1/4" -11	16
TW-TUEG 112 35 MG	35	35,0	G 1.1/2"	16
TW-TUEG 112 38 MG	38	38,4	G 1.1/2"	16
TW-TUEG 20 38 MG	38	38,4	G 2" -11	16
TW-TUEG 20 50 MG	50	50,4	G 2" -11	16
TW-TUEG 212 63 MG	63	63,4	G 2.1/2" -11	16
TW-TUEG 30 75 MG	75	75,4	G 3" -11	16
TW-TUEG 40 100 MG	100	100,4	G 4" -11	16

DN = Nominal diameter, nominal width

Product versions

TW-TUEG VA Tank truck fitting, stainless steel, Stainless steel

Accessories

KS AL	Clamp ring fitting, aluminium
KS FIX AL	Clamping shell for pinning, aluminium

Accessory for following products

TW	Tank truck hose
TW OW	Tank truck hose without helix