


TW-TUEG VA

Tank truck fitting, stainless steel

HANSA FLEX

Properties

Application	Tankers
Connection 1	Hose connection
Connection 2	BSP nut thread
Sealing form 2	Flat seal
Design	with safety collar
Standard	DIN EN 14 420-5
Scope of supply	with PTFE flat seal
Material	Stainless steel

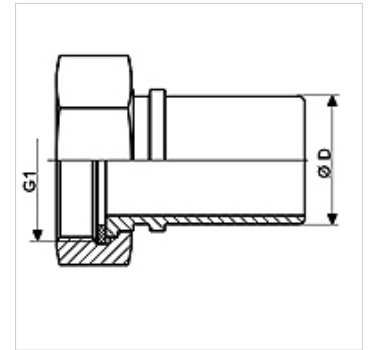

Item

Identification	DN*	Ø D (mm)	G1	Max. working pressure (bar)
TW-TUEG 12 13 VA	13	13,4	G 1/2" -14	16
TW-TUEG 34 19 VA	19	19,4	G 3/4" -14	16
TW-TUEG 10 25 VA	25	25,4	G 1" -11	16
TW-TUEG 114 32 VA	32	32,4	G 1.1/4" -11	16
TW-TUEG 112 38 VA	38	38,4	G 1.1/2" -11	16
TW-TUEG 20 50 VA	50	50,4	G 2" -11	16
TW-TUEG 212 63 VA	63	63,4	G 2.1/2" -11	16
TW-TUEG 30 75 VA	75	75,4	G 3" -11	16
TW-TUEG 40 100 VA	100	100,4	G 4" -11	16

DN = Nominal diameter, nominal width

Product versions

TW-TUEG MG Tanker fitting, brass, Brass

Accessories

KS AL Clamp ring fitting, aluminium
KS FIX AL Clamping shell for pinning, aluminium

Accessory for following products

TW Tank truck hose
TW OW Tank truck hose without helix