


HK HV 700

Adapter and threaded connectors 700 bar

HANSA FLEX

Properties

| | |
|--------------------|-------------------|
| Operating pressure | max. 700 bar |
| Surface | phosphate treated |
| Material | Steel C45 |

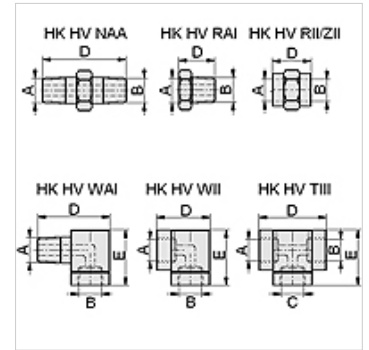

Ordering information

Other screw fittings on request.

| Item | | A | B | C | D | E | Weight |
|---------------------|---|--------------|--------------|--------------|------|------|--------|
| Identification | Design | | | | (mm) | (mm) | (kg) |
| HK HV NAA 14 14 | Male thread/Male thread connector | NPT 1/4" | NPT 1/4" -18 | - | 38 | - | 0,05 |
| HK HV NAA 38 38 | Male thread/Male thread connector | NPT 3/8" -18 | NPT 3/8" -18 | - | 51 | - | 0,05 |
| HK HV ZII 14 14 | Female thread/female thread connector | NPT 1/4" | NPT 1/4" -18 | - | 29 | - | 0,08 |
| HK HV ZII 38 38 | Female thread/female thread connector | NPT 3/8" -18 | NPT 3/8" -18 | - | 36 | - | 0,08 |
| HK HV RAI 38 14 | Male thread/female thread reduction | NPT 1/4" | NPT 3/8" -18 | - | 35 | - | 0,15 |
| HK HV RII 38 14 | Female thread/female thread reduction | NPT 1/4" | NPT 3/8" -18 | - | 28 | - | 0,14 |
| HK HV WAI 38 38 | Male thread/female thread elbow | NPT 3/8" -18 | NPT 3/8" -18 | - | 45 | 35 | 0,16 |
| HK HV WII 38 38 | Female thread/female thread elbow | NPT 3/8" -18 | NPT 3/8" -18 | - | 35 | 35 | 0,16 |
| HK HV TIII 14 14 14 | Female thread/female thread/female thread T-piece | NPT 1/4" | NPT 1/4" -18 | NPT 1/4" -18 | 45 | 35 | 0,20 |
| HK HV TIII 38 38 38 | Female thread/female thread/female thread T-piece | NPT 3/8" -18 | NPT 3/8" -18 | NPT 3/8" -18 | 45 | 35 | 0,20 |

Accessories

| | |
|-------------|-------------------------------------|
| NY 2100 | Thermoplastic extreme pressure hose |
| GKS | Rubber antikink protection |
| PNY 2100 HN | Swage nipple, AGN |
| PHY 2100 | Swage ferrule, NY 2100 |
| SKL HN SP | Screwed coupling, loose half |
| SKL ZUBS SP | Dust protection for SKL...SP |
| SKF IN SP | Screwed coupling fixed half |
| SKF ZUBS SP | Dust protection for SKF...SP |