
HK HV 700

Adapter and threaded connectors 700 bar

Properties

Operating pressure	max. 700 bar
Surface	phosphate treated
Material	Steel C45



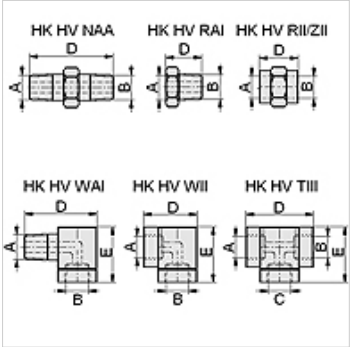

Ordering information

Other screw fittings on request.

Item

Identification	Design	A	B	C	D (mm)	E (mm)	Weight (kg)
HK HV NAA 14 14	Male thread/Male thread connector	NPT 1/4"	NPT 1/4" -18	-	38	-	0,05
HK HV NAA 38 38	Male thread/Male thread connector	NPT 3/8" -18	NPT 3/8" -18	-	51	-	0,05
HK HV ZII 14 14	Female thread/female thread connector	NPT 1/4"	NPT 1/4" -18	-	29	-	0,08
HK HV ZII 38 38	Female thread/female thread connector	NPT 3/8" -18	NPT 3/8" -18	-	36	-	0,08
HK HV RAI 38 14	Male thread/female thread reduction	NPT 1/4"	NPT 3/8" -18	-	35	-	0,15
HK HV RII 38 14	Female thread/female thread reduction	NPT 1/4"	NPT 3/8" -18	-	28	-	0,14
HK HV WAI 38 38	Male thread/female thread elbow	NPT 3/8" -18	NPT 3/8" -18	-	45	35	0,16
HK HV WII 38 38	Female thread/female thread elbow	NPT 3/8" -18	NPT 3/8" -18	-	35	35	0,16
HK HV TIII 14 14 14	Female thread/female thread/female thread T-piece	NPT 1/4"	NPT 1/4" -18	NPT 1/4" -18	45	35	0,20
HK HV TIII 38 38 38	Female thread/female thread/female thread T-piece	NPT 3/8" -18	NPT 3/8" -18	NPT 3/8" -18	45	35	0,20

Accessories

NY 2100	Thermoplastic extreme pressure hose
GKS	Rubber antikink protection
PNY 2100 HN	Swage nipple, AGN
PHY 2100	Swage ferrule, NY 2100
SKL HN SP	Screwed coupling, loose half
SKL ZUBS SP	Dust protection for SKL...SP
SKF IN SP	Screwed coupling fixed half
SKF ZUBS SP	Dust protection for SKF...SP

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.