

PA 700 SF 90 PLUS

Swage fitting, SFL angle 90°

HANSA FLEX

Properties

Application Swage fitting for HD 700 PLUS hoses

Connection 1 SAE flange connection 3000 PSI

Sealing form 1 flat seal with SF O-ring

Short code SFL


Standard SAE J518
ISO 6162-1

Integration with pull-out protection (interlock)

Scope of supply Swage nipple + swage ferrule

Material Steel

Surface electro galvanised

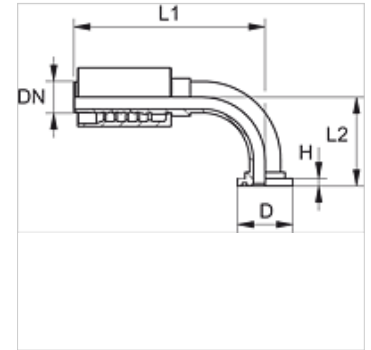

Item

Identification	DN	Size	Inches	Flange size	D (mm)	H (mm)	L1 (mm)	L2 (mm)
PA 720 SF 25 90 PLUS	19	12	3/4"	1"	44,5	8,1	139,8	71,0
PA 725 SF 90 PLUS	25	16	1"	1"	44,5	8,1	155,6	71,0
PA 725 SF 32 90 L 80 PLUS	25	16	1"	1.1/4"	50,8	8,1	144,0	80,0
PA 725 SF 32 90 L 100 PL	25	16	1"	1.1/4"	50,8	8,1	174,3	100,0
PA 750 SF 90 PLUS	50	32	2"	2"	71,4	8,1	247,6	134,0