PA 700 SF 90 PLUS


Swage fitting, SFL angle 90°

HANSA-FLEX

Properties

Application	Swage fitting for HD 700 PLUS hoses
Connection 1	SAE flange connection 3000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFL
Standard	SAE J518 ISO 6162-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



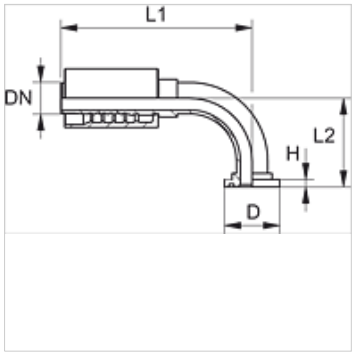

Item

Identification	DN	Size	Inches	Flange size	D (mm)	H (mm)	L1 (mm)	L2 (mm)
PA 720 SF 25 90 PLUS	19	12	3/4"	1"	44,5	8,1	139,8	71,0
PA 725 SF 90 PLUS	25	16	1"	1"	44,5	8,1	155,6	71,0
PA 725 SF 32 90 L 80 PLUS	25	16	1"	1.1/4"	50,8	8,1	144,0	80,0
PA 725 SF 32 90 L 100 PL	25	16	1"	1.1/4"	50,8	8,1	174,3	100,0
PA 750 SF 90 PLUS	50	32	2"	2"	71,4	8,1	247,6	134,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.