


# PA 700 SK6 90 PLUS

Swage fitting, SK6 angle 90°

**HANSA FLEX**

## Properties

|                           |                                      |
|---------------------------|--------------------------------------|
| <b>Application</b>        | Swage fitting for HD 700 PLUS hoses  |
| <b>Connection 1</b>       | SAE flange connection 6000 PSI       |
| <b>Sealing form 1</b>     | flat seal with SF O-ring             |
| <b>Integration</b>        | with pull-out protection (interlock) |
| <b>Scope of supply</b>    | Swage nipple + swage ferrule         |
| <b>Additional feature</b> | cone SAE fitting                     |
| <b>Material</b>           | Steel                                |
| <b>Surface</b>            | electro galvanised                   |

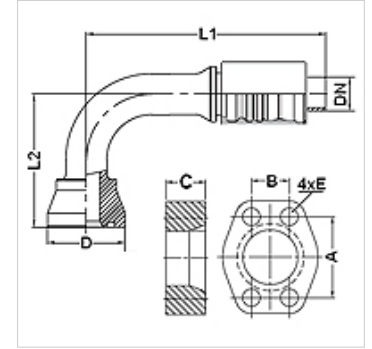

## Item

| Identification            | DN | Size | Inches | Flange size | D<br>(mm) | M metr.   | L1<br>(mm) | L2<br>(mm) | A<br>(mm) | B<br>(mm) | C<br>(mm) | E<br>(mm) |
|---------------------------|----|------|--------|-------------|-----------|-----------|------------|------------|-----------|-----------|-----------|-----------|
| PA 720 SK6 90 PLUS        | 19 | 12   | 3/4"   | 3/4"        | 43,5      | M 10 x 45 | 134,8      | 75,0       | 50,8      | 23,8      | 25,0      | 11        |
| PA 725 SK6 90 PLUS        | 25 | 16   | 1"     | 1"          | 49,4      | M 12 x 50 | 155,0      | 90,0       | 57,2      | 27,8      | 27,0      | 13        |
| PA 725 SK6 32 90 PLUS     | 25 | 16   | 1"     | 1.1/4"      | 57,4      |           | 167,6      | 105,0      | 66,6      | 31,8      | 32,0      | 15        |
| PA 732 SK6 90 PLUS        | 31 | 20   | 1.1/4" | 1.1/4"      | 57,4      |           | 185,0      | 120,0      | 66,6      | 31,8      | 32,0      | 15        |
| PA 732 SK6 90 L 160 PLUS  | 31 | 20   | 1.1/4" | 1.1/4"      | 57,4      |           | 185,0      | 160,0      | 66,6      | 31,8      | 32,0      | 15        |
| PA 732 SK6 40 90 PLUS     | 31 | 20   | 1.1/4" | 1.1/2"      | 68,4      |           | 213,1      | 125,9      | 79,3      | 36,5      | 40,0      | 17        |
| PA 740 SK6 90 PLUS        | 38 | 24   | 1.1/2" | 1.1/2"      | 68,4      |           | 234,0      | 140,0      | 79,3      | 36,5      | 40,0      | 17        |
| PA 740 SK6 90 L180 PLUS   | 38 | 24   | 1.1/2" | 1.1/2"      | 68,4      |           | 234,0      | 180,0      | 79,3      | 36,5      | 40,0      | 17        |
| PA 740 SK6 90 L215 PLUS   | 38 | 24   | 1.1/2" | 1.1/2"      | 68,4      |           | 234,0      | 215,0      | 79,3      | 36,5      | 40,0      | 17        |
| PA 740 SK6 50 90 PLUS     | 38 | 24   | 1.1/2" | 2"          | 83,5      |           | 287,0      | 160,0      | 96,8      | 44,5      | 50,0      | 21        |
| PA 740 SK6 50 90 L 180 PL | 38 | 24   | 1.1/2" | 2"          | 83,5      |           | 284,0      | 180,0      | 96,8      | 44,5      | 50,0      | 21        |
| PA 750 SK6 90 PLUS        | 51 | 32   | 2"     | 2"          | 83,5      |           | 272,9      | 180,0      | 96,8      | 44,5      | 50,0      | 21        |
| PA 750 SK6 90 L280 PLUS   | 51 | 32   | 2"     | 2"          | 83,5      |           | 217,6      | 280,0      | 96,8      | 44,5      | 50,0      | 21        |

## Accessories

|                      |                              |
|----------------------|------------------------------|
| <b>FS</b>            | Seal for SAE and ISO flanges |
| <b>SCHRAUBE M</b>    | Hexagon socket screw         |
| <b>SCHRAUBE M VZ</b> | Hexagon socket screw         |