


PA 700 SF6 105 PLUS

Swage fitting, SFS angle 105°

HANSA FLEX

Properties

| | |
|------------------------|--------------------------------------|
| Application | Swage fitting for HD 700 PLUS hoses |
| Connection 1 | SAE flange connection 6000 PSI |
| Sealing form 1 | flat seal with SF O-ring |
| Short code | SFS |
| Standard | SAE J518 ISO 6162-2 |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Steel |
| Surface | electro galvanised |

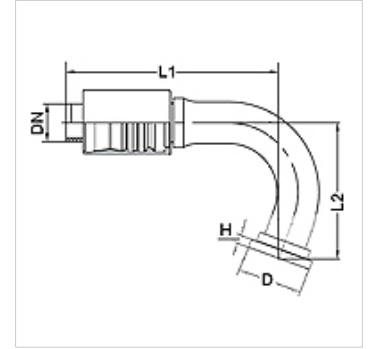

Item

| Identification | DN | Size | Inches | Flange size | Operating pressure (bar) | D (mm) | H (mm) | L1 (mm) | L2 (mm) |
|------------------------|----|------|--------|-------------|-----------------------------|-----------|-----------|------------|------------|
| PA 732 SF6 105 PLUS | 31 | 20 | 1.1/4" | 1.1/4" | 420,0 | 54,0 | 10,5 | - | - |
| PA 732 SF6 40 105 PLUS | 31 | 20 | 1.1/4" | 1.1/2" | 420,0 | 63,5 | 12,6 | 210,0 | 120,0 |