


# PA 700 SK6 75 PLUS

Swage fitting, SK6 angle 75°

**HANSA FLEX**

## Properties

|                           |                                      |
|---------------------------|--------------------------------------|
| <b>Application</b>        | Swage fitting for HD 700 PLUS hoses  |
| <b>Connection 1</b>       | SAE flange connection 6000 PSI       |
| <b>Sealing form 1</b>     | flat seal with SF O-ring             |
| <b>Integration</b>        | with pull-out protection (interlock) |
| <b>Scope of supply</b>    | Swage nipple + swage ferrule         |
| <b>Additional feature</b> | cone SAE fitting                     |
| <b>Material</b>           | Steel                                |
| <b>Surface</b>            | electro galvanised                   |

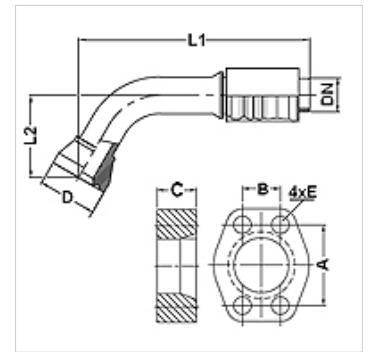

## Item

| Identification     | DN | Size | Inches | Flange size | D<br>(mm) | M metr. | L1<br>(mm) | L2<br>(mm) | A<br>(mm) | B<br>(mm) | C<br>(mm) | E<br>(mm) |
|--------------------|----|------|--------|-------------|-----------|---------|------------|------------|-----------|-----------|-----------|-----------|
| PA 750 SK6 75 PLUS | 51 | 32   | 2"     | 2"          | 83,5      |         | 289,6      | 155,0      | 96,8      | 44,5      | 50,0      | 21        |

## Accessories

|                      |                              |
|----------------------|------------------------------|
| <b>FS</b>            | Seal for SAE and ISO flanges |
| <b>SCHRAUBE M</b>    | Hexagon socket screw         |
| <b>SCHRAUBE M VZ</b> | Hexagon socket screw         |