


# HK DKE X 00 DC

Solenoid-operated directional control valve size 10 without coil

**HANSA FLEX**

## Properties

<b>Design</b>	4/2-way valve or 4/3-way valve 5-chamber valve with manual emergency operation for DC coils
<b>Scope of supply</b>	without coil or plug
<b>Operating pressure</b>	P, A, B: max. 315bar / T: max. 210bar
<b>Volumetric flow</b>	max. 120 l/min (note characteristic curves)
<b>Connection</b>	ISO/Cetop 05 size 10
<b>Mounting</b>	4 pcs. socket head screw M6x40 12.9

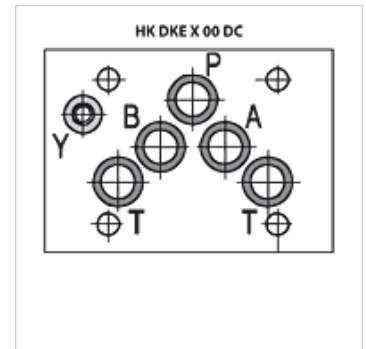

## Description

Can only be used for DC coils  
switching capacity limits see characteristic curves

## Ordering information

Further circuits and versions, volumetric flows and switching power limits on request

Item						
Identification	Type	Overlap	Piston type	Design	Weight (kg)	
HK DKE 1 610 X00DC	4/2	negative (open)	0 [PB/AT]-[ABPT]	Spring return	3,8	
HK DKE 1 611 X00DC	4/2	positive (closed)	1 [PB/AT]-[A/B/P/T]	Spring return	3,8	
HK DKE 1 613 X00DC	4/2	positive (closed)	3 [PB/AT]-[ABT/P]	Spring return	3,8	
HK DKE 1 631 2 X00DC	4/2	positive (closed)	1/2 [PB/AT]-[PA/BT]	Spring return	3,8	
HK DKE 1 631 2 A X00DC	4/2	positive (closed)	1/2 [PB/AT]-[PA/BT]	Spring return	3,8	
HK DKE 1 632 2 X00DC	4/2	positive (closed)	2/2 [PB/A/T]-[PA/B/T]	Spring return	3,8	
HK DKE 1 710 X00DC	4/3	negative (open)	0 [PB/AT]-[ABPT]-[PA/BT]	spring return to 0	4,1	
HK DKE 1 711 X00DC	4/3	positive (closed)	1 [PB/AT]-[A/B/P/T]-[PA/BT]	spring return to 0	4,1	
HK DKE 1 713 X00DC	4/3	positive (closed)	3 [PB/AT]-[ABT/P]-[PA/BT]	spring return to 0	4,1	
HK DKE 1 714 X00DC	4/3	negative (open)	4 [PA/BT]-[A/B/PT]-[PB/AT]	spring return to 0	4,1	
HK DKE 1 751 2 X00DC	4/2	positive (closed)	1/2 [PB/AT]-[PA/BT]	2 latching positions	3,8	

Piston type example: [A/B/PT] = [A blocked / B blocked / P+T connected]

## Accessories

HK SP CAE	Coil for solenoid-operated directional control valve HK DKE
HK SP DIN 43650	Electrical plug for solenoid coil DIN 43650 / ISO 4400
HK M HK DK	Set of bolts for NG 10 valves types HK DK11/DKE/DG4V5
HK SP WPD / SP SET / 6 OE	Emergency hand operation for directional solenoid valve