

GV HB IR T

Rotary fitting, friction bearing

HANSA FLEX

Properties

Connection 1 BSP external thread, cylindrical

Sealing form 1 60° inner cone

Connection 2 BSP cylindrical internal threads

Sealing form 2 Flat seal

Design Rotary fitting

Construction type Friction bearing

Construction straight


Operating pressure max. 410 bar

Temp. min. -40 °C

Temp. max. 100 °C

Material Steel

Surface electro galvanised

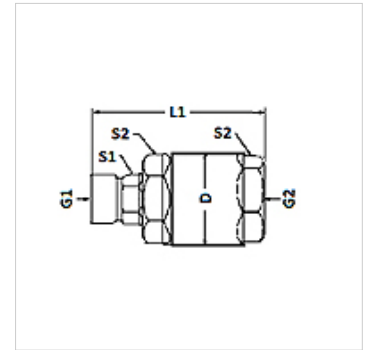

Item

Identification	G1	G2	D (mm)	L1 (mm)	S1	S2
GV HB 08 IR T	G 1/2" -14	G 1/2" -14	38,86	74,68	3/4"	
GV HB 12 IR T	G 3/4" -14	G 3/4" -14	50,80	96,77		
GV HB 16 IR T	G 1" -11	G 1" -11	56,39	109,47		

SW, S1, S2 = With across flats