


GV HJOF HJOF T

Rotary fitting, friction bearing

Properties

| | |
|---------------------------|-----------------------|
| Connection 1 | ORFS external threads |
| Sealing form 1 | flat seal with O-ring |
| Connection 2 | ORFS external threads |
| Sealing form 2 | flat seal with O-ring |
| Design | Rotary fitting |
| Construction type | Friction bearing |
| Construction | straight |
| Operating pressure | max. 410 bar |
| Temp. min. | -40 °C |
| Temp. max. | 100 °C |
| Material | Steel |
| Surface | electro galvanised |

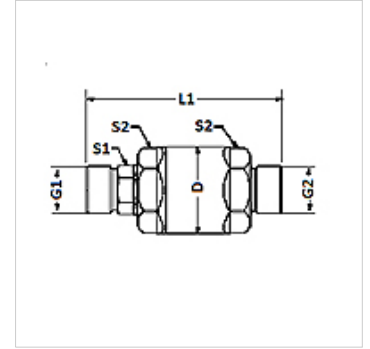

Item

| Identification | G1 | G2 | D (mm) | L1 (mm) | S1 | S2 |
|-------------------|----------------|----------------|-----------|------------|------|----|
| GV HJOF 08 HJOF T | 13/16" -16 UN | 13/16" -16 UN | 38,86 | 88,90 | 3/4" | |
| GV HJOF 10 HJOF T | 1" -14 UNS | 1" -14 UNS | 47,25 | 96,27 | | |
| GV HJOF 12 HJOF T | 1.3/16" -12 UN | 1.3/16" -12 UN | 53,09 | 114,81 | | |

SW, S1, S2 = With across flats