
HK SD1
Plug-in display digital

Properties

Operating temperature max.	80 °C
Material	Housing: Aluminium
Use	For gear flow meters HK VCA



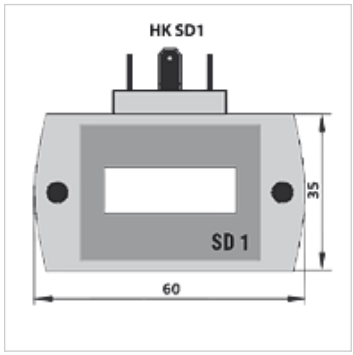

Description

The on-site display for the gear flow meter HK VCA with plug-in connection in accordance with DIN 43650 is usable in the widest possible range of applications. The display is simply inserted between the plug and socket of the flow meter. As with standard meters, square wave signal output is available to allow external processing.
The plug-in display is freely programmable. All the necessary settings can be made using two buttons. The programmed data are stored on an EEPROM and are therefore permanently retained, even in the event of power outages.
Display: 7-segment LED
Keypad: 2 keys behind front panel
Supply voltage: 24 VDC
Protection class IP 64 DIN 40050

Item

Identification	Design	Weight (kg)
HK SD1 I 24	Output 0-20 mA / 4-20 mA	0,2
HK SD1 K 24	Output 2x relay contact 24VDC / 1A	0,2

Accessory for following products

HK VCA	Gear flow meter

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.