


PA 800 SF6

Swage fitting, SFS

Properties

| | |
|------------------------|--------------------------------------|
| Application | Swage fitting for HD 800 hoses |
| Connection 1 | SAE flange connection 6000 PSI |
| Sealing form 1 | flat seal with SF O-ring |
| Standard | SAE J518 ISO 6162-2 |
| Short code | SFS |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Steel |
| Surface | electro galvanised |

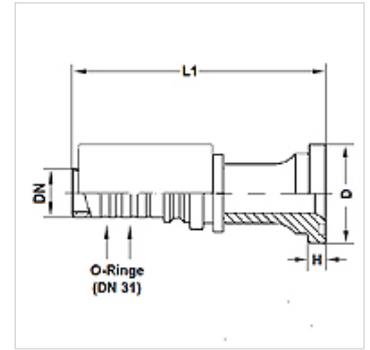

Note

Added innovative and unique new O-ring seal 27,3mm x 2,4mm (Material:EPDM)to the -20 size nipples. The O-ring design prevents fluid migration thus providing zero leakage as measured to SAE and EN specifications

Item

| Identification | DN | Size | Inches | Flange size | D (mm) | H (mm) | L1 (mm) | Operating pressure (bar) |
|----------------|----|------|--------|-------------|--------|--------|---------|--------------------------|
| PA 820 SF6 | 19 | 12 | 3/4" | 3/4" | 41,3 | 8,8 | 110,6 | 500,0 |
| PA 820 SF6 25 | 19 | 12 | 3/4" | 1" | 47,6 | 9,6 | 118,2 | 500,0 |
| PA 825 SF6 | 25 | 16 | 1" | 1" | 47,6 | 9,6 | 134,0 | 500,0 |
| PA 825 SF6 32 | 25 | 16 | 1" | 1.1/4" | 54,0 | 10,4 | 134,9 | 500,0 |
| PA 832 SF6 25 | 31 | 20 | 1.1/4" | 1" | 47,6 | 9,6 | 166,4 | 500,0 |
| PA 832 SF6 | 31 | 20 | 1.1/4" | 1.1/4" | 54,0 | 10,5 | 145,2 | 500,0 |