
DUM
U-ring DUM

Properties

Design	U-ring
Operating pressure	up to 120 bar
Sliding speed max.	0,5 m/s
Design	Metric
Temp. min.	-30 °C
Temp. max.	100 °C
Media	Mineral oils Water-air
Installation	on one-piece pistons A on multi-part pistons B
Material	Seal: NBR 90° Shore A
Application	Hydraulics + pneumatics



Toleranz / Tolerance		
d	D	L
H8 / f7	H9	+0,5 0

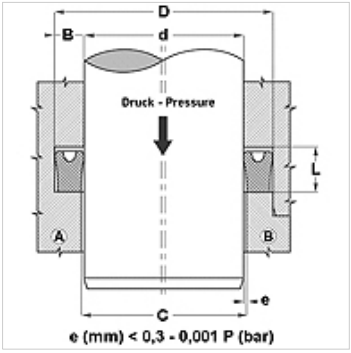

Note

Dimensions see page Rod seals ...

Description

Low-friction seal.
Simple solution.
For rods and pistons.

Ordering information

We are able to produce seals with diameters of 20 to 510 mm with short lead times.

Item

Identification	D (mm)	d (mm)	L (mm)	H (mm)
DUM 12 05	12	5	6,5	5,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.