


FI HD E HY

Filter element for high-pressure filter HY

HANSA FLEX

Properties

| | |
|---------------------------|------------------------|
| Special features | Δp max. 20 bar |
| Temp. min. | -25 °C |
| Temp. max. | 120 °C |
| Material | Gasket: NBR |
| Operating pressure | max. 210 bar |

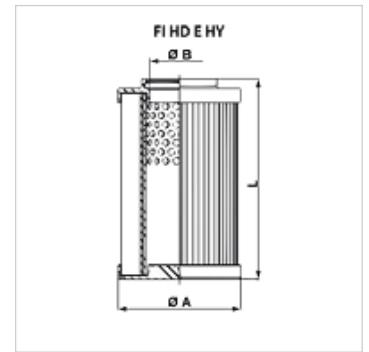

Item

| Identification | Filter mesh size (μm) | Filter area (cm^2) | Filter material | A (mm) | \O B (mm) | \O C (mm) | Weight (kg) |
|----------------------------|---------------------------------------|----------------------------------|---------------------|-----------|-----------------------|-----------------------|----------------|
| FI HD E HY 0050 A16 | 16,0 | 1275 | inorganic | 115,0 | 70,0 | 34,1 | 0,48 |
| FI HD E HY 334 SP15 | 15,0 | 5840 | synthetic polyester | 334,0 | 94,5 | 81,5 | 1,15 |

Q_{max} - max intake volumetric flow