

# FI HD E HY

Filter element for high-pressure filter HY

**HANSA FLEX**

## Properties


**Special features**  $\Delta p$  max. 20 bar

**Temp. min.** -25 °C

**Temp. max.** 120 °C

**Material** Gasket: NBR

**Operating pressure** max. 210 bar

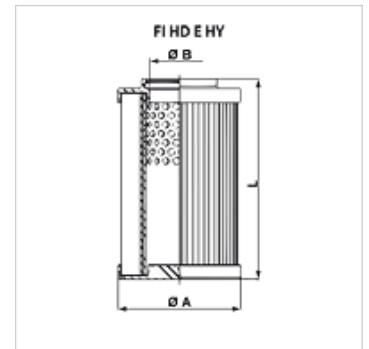

## Item

Identification	Filter mesh size ( $\mu\text{m}$ )	Filter area ( $\text{cm}^2$ )	Filter material	A (mm)	$\varnothing$ B (mm)	$\varnothing$ C (mm)	Weight (kg)
<b>FI HD E HY 0050 A16</b>	16,0	1275	inorganic	115,0	70,0	34,1	0,48
<b>FI HD E HY 334 SP15</b>	15,0	5840	synthetic polyester	334,0	94,5	81,5	1,15

Q<sub>max</sub> - max intake volumetric flow