


# FI ND E UF

Filter element for low-pressure filter UF

**HANSA FLEX**

## Properties

Temp. min.	-25 °C
Temp. max.	120 °C
Material	Gasket: NBR
Operating pressure	Max. 10 bar

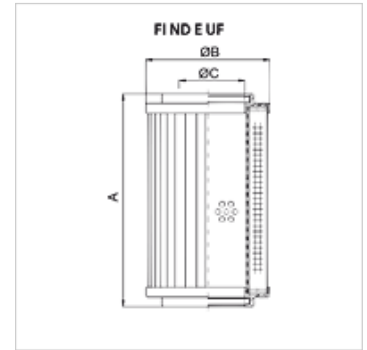

## Item

Identification	Filter mesh size ( $\mu\text{m}$ )	Filter area ( $\text{cm}^2$ )	Filter material	A (mm)	Ø B (mm)	Ø C (mm)	Weight (kg)
FI ND E UF 0010 A03	3,0	3260	inorganic fiberglass	210,0	99,0	51,5	1,00
FI ND E UF 0010 A06	6,0	3260	inorganic fiberglass	210,0	99,0	51,5	1,00
FI ND E UF 0011 A10	10,0	3260	inorganic fiberglass	210,0	99,0	51,5	0,58

for Bypass flow filter system NSFA Typ C

## Spare part for following products

NSFA Typ C      Bypass flow filter system Type C