

# FI SP E E


Filter element for spin-on filter E

**HANSA FLEX**

## Properties

### Special features

Temp. min.	-25 °C
Temp. max.	120 °C
Material	Gasket: NBR
Operating pressure	max. 12 bar
Use	For spin-on filters FI SP R 1, FI SP R 2, FI SP R 3

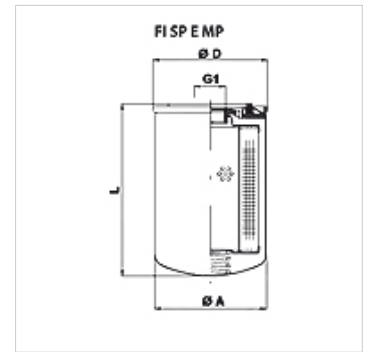

## Item

Identification	Filter mesh size ( $\mu\text{m}$ )	Filter area ( $\text{cm}^2$ )	Qmax (L/min)	Filter material	for filter type	G1	$\varnothing A$ (mm)	$\varnothing D$ (mm)	L (mm)	Weight (kg)
FI SP E E 0050 P25	10,0	2419	100	organic	FI SP R 53, 58	G 3/4"	95,0	96,0	147,0	0,40

Qmax - max intake volumetric flow

## Accessories

FI SP R/S FK Filter head for spin-on return flow filter / suction filter

## Spare part for following products

FI SP R 1	Spin-on return flow filter type 1
FI SP R 2	Spin-on return flow filter type 2
FI SP R 3	Spin-on return flow filter type 3