


HK DKE X 00 AC

Solenoid-operated directional control valve size 10 without coil

HANSA FLEX

Properties

| | |
|---------------------------|--|
| Design | 4/2-way valve or 4/3-way valve 3-chamber valve with manual emergency operation for AC coils |
| Scope of supply | without coil or plug |
| Operating pressure | P, A, B: max. 350bar / T: max. 160bar |
| Volumetric flow | max. 150 l/min (note characteristic curves) |
| Connection | ISO/Cetop 05 size 10 |
| Mounting | 4 pcs. socket head screw M6x40 12.9 |

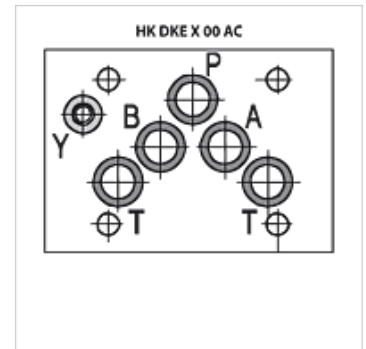

Description

Can only be used for AC coils
switching capacity limits see characteristic curves

Ordering information

Further circuits and versions, volumetric flows and switching power limits on request

| Item | | | | | | |
|----------------------|------|-------------------|-----------------------------|----------------------|-------------|--|
| Identification | Type | Overlap | Piston type | Design | Weight (kg) | |
| HK DKE 1610 X 00AC | 4/2 | negative (open) | 0 [PB/AT]-[ABPT] | Spring return | 3,6 | |
| HK DKE 1611 X 00AC | 4/2 | positive (closed) | 1 [PB/AT]-[A/B/P/T] | Spring return | 3,6 | |
| HK DKE 1613 X 00AC | 4/2 | positive (closed) | 3 [PB/AT]-[ABT/P] | Spring return | 3,6 | |
| HK DKE 1631 2 A 00AC | 4/2 | positive (closed) | 1/2 [PB/AT]-[PA/BT] | Spring return | 3,6 | |
| HK DKE 1631 2 X 00AC | 4/2 | positive (closed) | 1/2 [PB/AT]-[PA/BT] | Spring return | 3,6 | |
| HK DKE 1632 2 X 00AC | 4/2 | positive (closed) | 2/2 [PB/A/T]-[PA/B/T] | Spring return | 3,6 | |
| HK DKE 1710 X 00AC | 4/3 | negative (open) | 0 [PB/AT]-[ABPT]-[PA/BT] | spring return to 0 | 4,1 | |
| HK DKE 1711 X 00AC | 4/3 | positive (closed) | 1 [PB/AT]-[A/B/P/T]-[PA/BT] | spring return to 0 | 4,1 | |
| HK DKE 1713 X 00AC | 4/3 | positive (closed) | 3 [PB/AT]-[ABT/P]-[PA/BT] | spring return to 0 | 4,1 | |
| HK DKE 1714 X 00AC | 4/3 | negative (open) | 4 [PA/BT]-[A/B/PT]-[PB/AT] | spring return to 0 | 4,1 | |
| HK DKE 1751 2 X 00AC | 4/2 | positive (closed) | 1/2 [PB/AT]-[PA/BT] | 2 latching positions | 3,3 | |

Piston type example: [A/B/PT] = [A blocked / B blocked / P+T connected]

Accessories

| | |
|---------------------------|---|
| HK SP CAE | Coil for solenoid-operated directional control valve HK DKE |
| HK SP DIN 43650 | Electrical plug for solenoid coil DIN 43650 / ISO 4400 |
| HK M HK DK | Set of bolts for NG 10 valves types HK DK11/DKE/DG4V5 |
| HK SP WPD / SP SET / 6 OE | Emergency hand operation for directional solenoid valve |