TUE FF PN16


FIXED flange, with serrated tail, PN10/16, steel VZ

HANSA-FLEX

Properties

Connection 1	Fixed flange at pressure rating PN16
Construction	straight
Sealing form 1	flat sealing
Application	Industry
Standard	DIN EN 1092-1



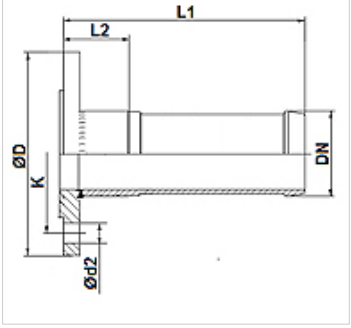

Item

Identification	DN*	Size	Inches	Ø D (mm)	K (mm)	Ø d2 (mm)	N (mm)
TUE 20 FF PN16	20	12	3/4"	105,0	75	14	4
TUE 25 FF PN16	25	16	1"	115,0	85	14	4
TUE 32 FF PN16	32	20	1.1/4"	140,0	100	18	4
TUE 38 FF PN16	40	24	1.1/2"	150,0	110	18	4
TUE 50 FF PN16	50	32	2"	165,0	125	18	4
TUE 63 FF PN16	63	40	2.1/2"	185,0	145	18	4
TUE 75 FF PN16	75	50	3"	200,0	160	18	8
TUE 102 FF PN16	100	64	4"	220,0	180	18	8

N = number of holes

Accessories

KS AL	Clamp ring fitting, aluminium
KS FIX AL	Clamping shell for pinning, aluminium

Additional elements

FD C4400	Flat seal

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.